


Ductile Iron Manhole Drop

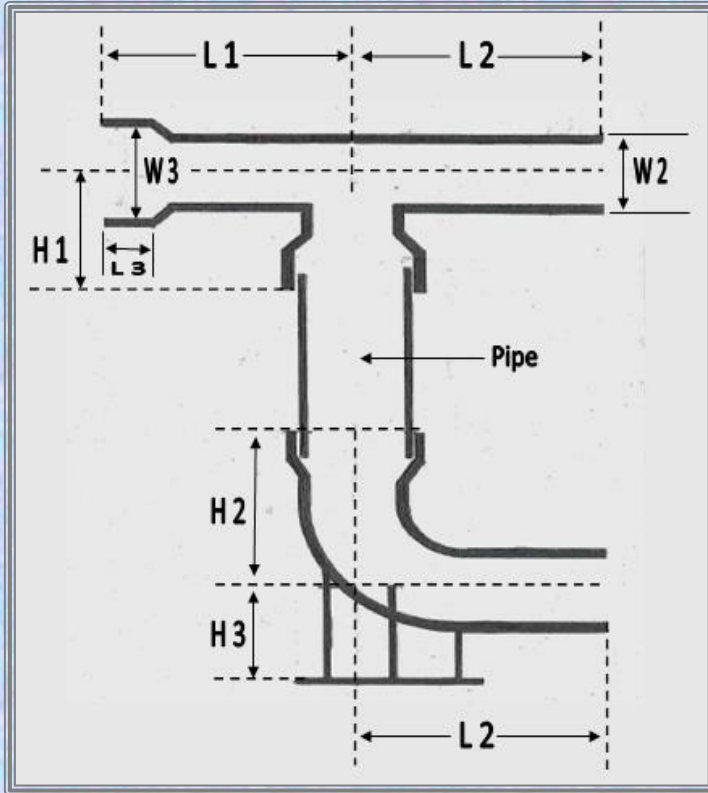

Size (DN)	L1	L2	L3	W2	W3	H1	H2	H3
150	250	300	80	170	240	250	300	160
225	335	450	105	250	325	335	375	160
300	380	500	110	327	400	380	430	200
375	450	580	110	406	570	450	510	250
450	510	650	120	482	660	510	590	290
525	550	700	120	559	740	550	640	325
600	600	770	120	636	825	600	740	365
675	660	830	150	712	880	660	850	415
750	720	900	150	792	1050	720	930	450
900	800	1000	160	945	1200	800	1080	530
1050	880	1100	160	1099	1300	880	1230	605
1200	960	1200	160	1252	1480	960	1380	685
1350	1040	1300	160	1412	1650	1040	1530	760
1500	1130	1400	160	1566	1830	1130	1680	840
1650	1210	1500	160	1719	1950	1210	1830	920
1800	1300	1600	160	1873	2130	1300	1980	1000

Material Specification

- Socket Spigot 90 Degree Duckfoot Bend : Ductile Iron Materials
 - Socket Spigot Tee with Socket Branch : Ductile Iron Materials
 - Internal Lining : High Alumina Cement
 - External Lining : Cold Applied Epoxy
- @ Outside Diameter of sewer pipe must be determined upon placement of order